



Heads Up Feature



Double Sleeve Pallet (Sold Separately)

### Options

- Rapid Wave quartz flash cure
- Infrared Panel flash cure
- Pallet locator for slide-style mounting pallets
- Foot pedal to control indexing
- Quick-release pallet system
- Variety of specialty and custom pallets available
- Special sizing available for doorways as small as 28"
- Servo print heads – allow you to control print stroke length, squeegee pressure and angle digitally
- Individual print head controls – membrane panel or touchscreen (on machines with servo print heads)
- Heads Up feature – on machines with an odd number of print heads, this allows you to raise the last head on a hinge to create dedicated loading and unloading stations.

It's like getting two machines in one. For example, a 10 station/9 color machine can become a 10 station/8 color machine when you need two operators to load and unload and aren't using the last head, allowing you to work faster.

CONFIGURATION	MAX PRINT AREA	MAX SCREEN SIZE	CONFIGURATION	MAX PRINT AREA	MAX SCREEN SIZE
S	15" x 16"	21" x 28"	L	20" x 20"	26" x 36"
M	16" x 18"	23" x 33"	XL	20" x 28"	26" x 43"

STATIONS/COLORS	POWER REQUIREMENT*	VOLT MODEL S DIAMETER	VOLT MODEL M DIAMETER	VOLT MODEL L DIAMETER	VOLT MODEL XL DIAMETER
6/4	1 ph 18A, 3 ph 11A	9'4"	9'8"	10'5"	N/A
6/5	1 ph 19A, 3 ph 12A	9'4"	9'8"	10'5"	N/A
8/6	1 ph 20A, 3 ph 13A	10'2"	10'11"	12'0"	13'10"
8/7	1 ph 21A, 3 ph 14A	10'2"	10'11"	12'0"	13'10"
10/8	1 ph 31A, 3 ph 18A	11'2"	12'3"	13'8"	15'0"
10/9	1 ph 32A, 3 ph 19A	11'2"	12'3"	13'8"	15'0"
12/10	1 ph 36A, 3 ph 20A	12'4"	13'6"	15'3"	16'6"
12/11	1 ph 37A, 3 ph 21A	12'4"	13'6"	15'3"	16'6"
14/12	3 ph 23A	N/A	15'7"	16'8"	18'0"
16/14	3 ph 32A	N/A	N/A	18'4"	19'6"
18/16	3 ph 36A	N/A	N/A	19'8"	20'10"
20/18	3 ph 38A	N/A	N/A	21'4"	22'8"

\*208-230 VAC, 50/60 HZ

# VOLT

## Professional Grade All-Electric Automatic Press

### Reliable and Long Lasting


- No pneumatic parts for years of reliable service and minimal maintenance
- No air compressor or chiller required

### Servo Electric Technology

- Quiet, smooth and highly precise operation
- Extremely efficient

### Available in configurations of:


- Four different maximum print areas up to 20" x 28"
- 6 stations/4 colors up to 20 stations/18 colors

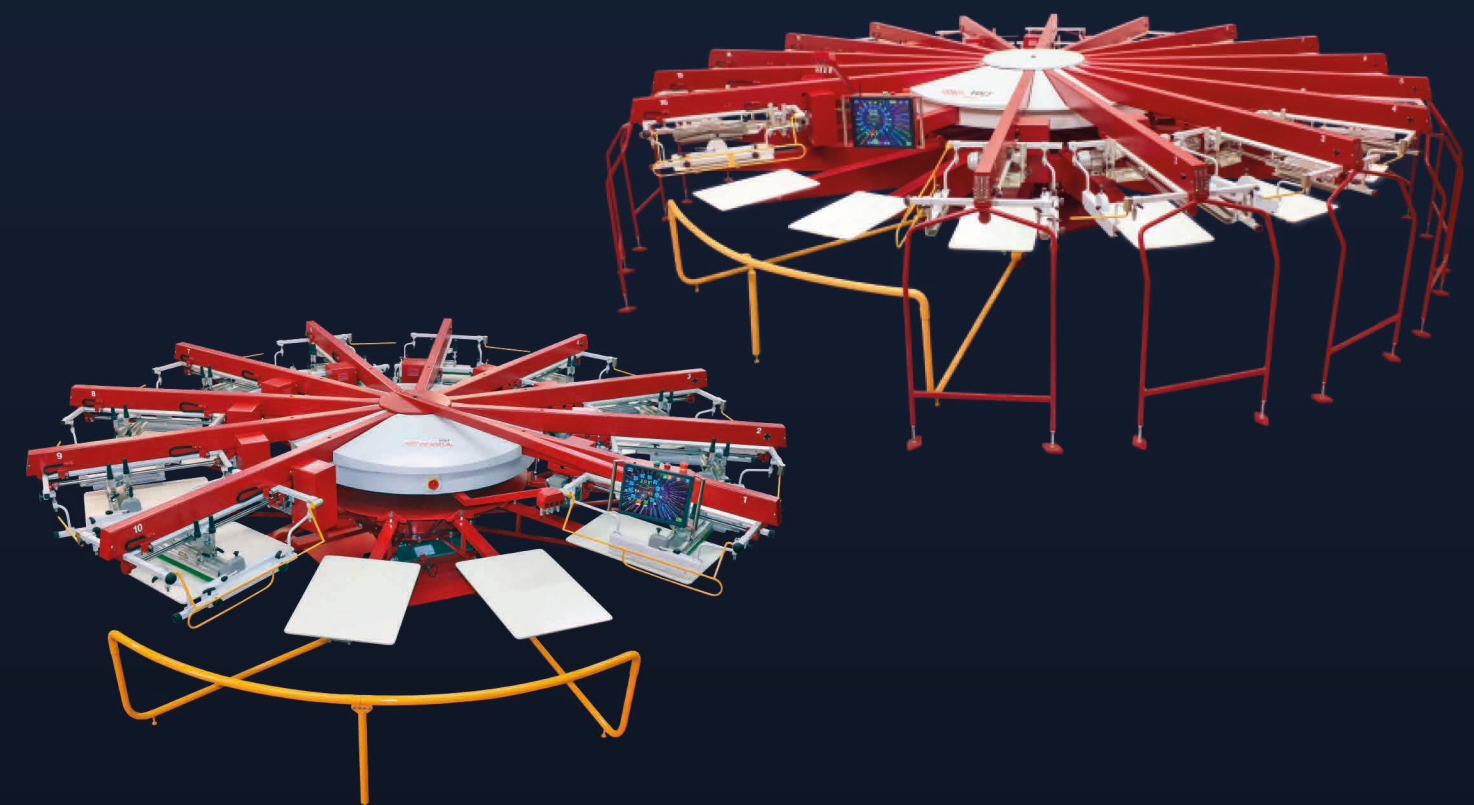

## STANDARD FEATURES

### Control Interface

- Aries 2 OS – User-friendly operating system
- 15" touchscreen with intuitive one-touch access to all job settings and machine functions for fast setups
- Rotating boom arm for easy access to each print head
- Easy access to operator's manual
- Automatic software updates available via Wi-Fi
- Receive automatic email notifications with production statistics
- Connect the machine directly to Anatol Service with Presentation Mode

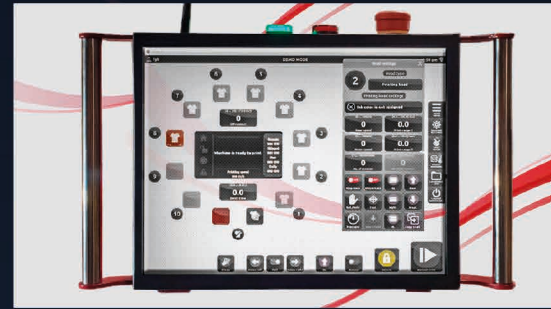


15" industrial-grade touchscreen monitor



Intuitive Aries 2 operating system



AC electric print heads standard, servo-driven print heads optional

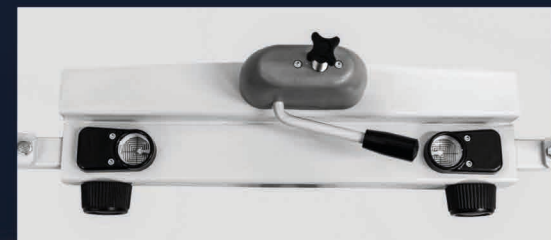

Easy-to-read micro-registration targets with lenses for protection and magnification (NEW FEATURE)

### Functions

- Quickly save and recall all parameters of a stored job: off-contact distance, indexer speed, print head speed, number of strokes, flash cure time and temperature, ink colors, print mode, and (with servo heads only) stroke length
- Easily copy the same print head settings to all heads

### Print Heads

- AC electric-driven print heads enhance smoothness, speed and power
- Front and rear stroke adjustment
- Single-handed tool-less squeegee/flood bar locking
- Easily adjustable side screen clamps accommodate a wide range of screen sizes
- Optional servo-driven print heads offer digital stroke length, squeegee pressure and angle adjustment

### Registration

- True three-point micro-registration of screen (front-back, left-right, rotational movement)
- Compatible with Anatol's ARME pre-registration system, as well as a number of other different pre-registration systems available on the market

## CHANGE THE WAY YOU WORK

### Increased Efficiency. Higher Productivity.

Anatol's VOLT all-electric screen printing machine introduces "smart" technology that lets screen printers surpass the possibilities of traditional screen printing equipment.

### What's a servo motor?


Unlike other automatic presses, the VOLT uses servo motors for power. It's a rotary actuator that allows for precise control of angular position, velocity and acceleration.

In simple terms, these "smart" motors make your job easier by giving you a more efficient way of running your business.

## STANDARD FEATURES

### Skip Shirt & Smash Button


- Save time and supplies by preventing the press from printing on empty pallets with our Skip Shirt function on the control panel
- Smash button allows for easy skipping of improperly loaded shirts to prevent misprints - more reliable than systems utilizing sensors

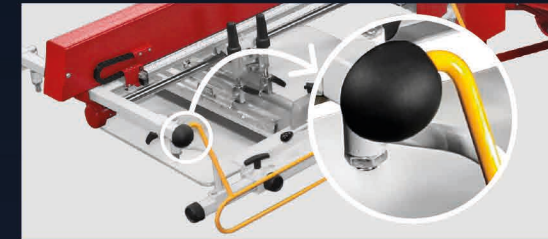

Smash button helps prevent misprints

### Indexing System

- Servo indexer allows for clockwise, counter-clockwise and half indexing – easily switch at the press of a button from job to job
- Smooth and quiet indexing at high speeds
- Ball bearing lead screw design with internal lubrication system
- Free-wheel capability available on most models allows for manual carousel rotation

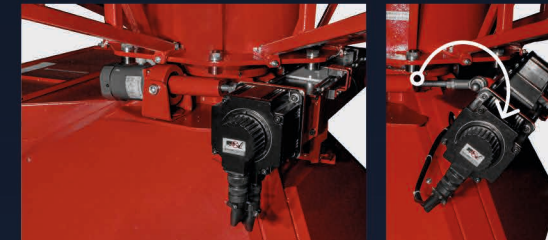

High quality servo indexer for smooth, quiet rotation at even the highest production speeds, as well as free wheel capability for manual rotation

### Central Off-Contact

- Digitally-controlled central off-contact with 38 settings up to 2/5", adjustable right from the machine's touchscreen



Digital off-contact adjustment right from the touchscreen control panel

### Pallet System

- Slide-style pallets allow for adjustments in print location
- Tool-free locking
- Precise four-point pallet leveling system
- 16" x 22" solid aluminum, low profile rubber-coated pallets standard, with a wide variety of custom pallets available separately



Slide-style pallet system for easy adjustment and changeover

### Safety System

- Safety bars located between each print head and on each side of the load and unload stations ensure safety during press set-up and operation



Industry-leading safety bars ensure safe set-up and operation

### Three-Year Limited Warranty

Every effort has been made to ensure the accuracy of the promotional information included in this brochure. Specifications are subject to change. Anatol Equipment Manufacturing Co. and its subsidiaries, if any, expressly disclaim any liability for damages, consequential or incidental, resulting from the purchase, transportation, installation, or use of any products based upon information contained within this brochure. Any rights or remedies are limited solely to those provided in writing by Anatol Equipment Manufacturing Co. at the time of sale.